

Tefen Flow Solutions



Quick Release Socket for Tefen's Hose Fittings

Applications:



Industry

Technical Info:



Working pressure
Up to 6 BAR
(87 psi) at 20° C




Temperature
4 - 90° C



part	material
Body	Acetal
Internal Parts	Acetal
Spring + Ball	Stainless Steel

Benefits:

- Effortless attachment/ detachment to the system with Tefen's Hose Fittings.
- Easy to use.
- Allows leak-free system checks.
- No need for seals.

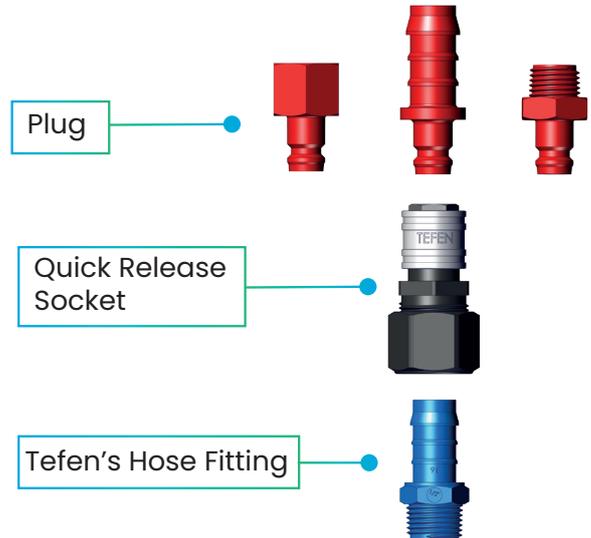

Quick Release Socket

Cat. No.	L [mm]	SW	O-ring	Suitable to connect with Tefen's Hose Fitting [mm]	Color
22080004131	57	25	EPDM	12	Grey
22080004161	57	27	EPDM	16	White



Plug - Hose Connector

Cat. No.	Tube ID mm	L mm	D
12081645006	5	37.8	16.7
12081646006	6	39.8	16.7
12081648006	8	43.2	16.8
12081650006	10	43.2	16.8
12081652006	12	43.2	16.8

Plug - External Thread

Cat. No.	M (BSPT)	L mm	SW
12081404006	1/4"	31.2	17

Plug - Internal Thread

Cat. No.	M (BSPT)	L mm	SW
12081504006	1/4"	28.6	17



Tefen Flow & Dosing Technologies Ltd.

Kibbutz Nahsholim, 3081500 Israel | Tel. 972 4 6395554 | info@tefentech.com | tefentech.com