


Non-return valves with conical inlet/outlet

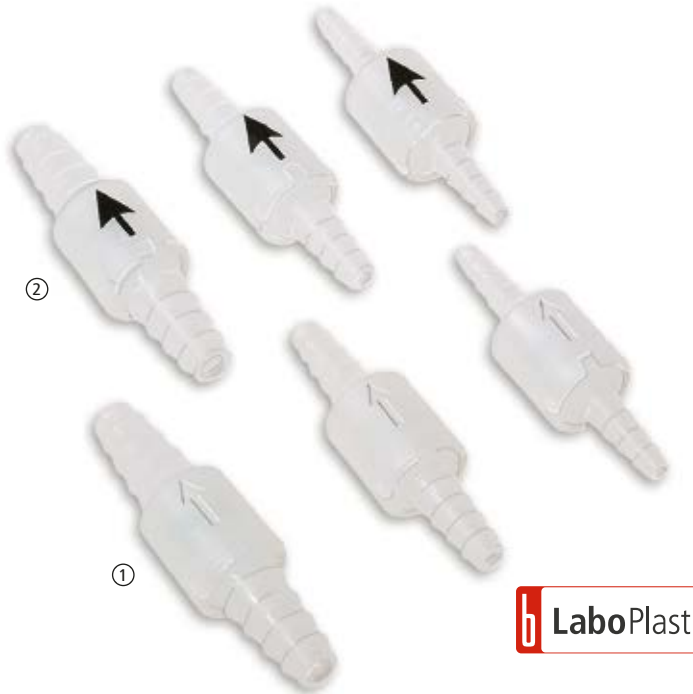

Retaining valve with embossed directional arrow or printed in black. With conical nozzles. Various uses.

- ▶ Resistant to compression max. 4 bar
- ▶ Operating temperature +0 to +40 °C
- ▶ With PP valve ball, on request also with ball made of stainless steel or PTFE

Non-return valves with conical inlet/outlet

| For dia. mm | Print | Price € | Quantity scale from | Scale price € | Item no. |
|-------------|----------|---------|---------------------|---------------|--------------|
| ① 6-8 | embossed | | 100 | | 8714-0060 N4 |
| ① 8-10 | embossed | | 100 | | 8714-0080 N4 |
| ① 10-14 | embossed | | 100 | | 8714-0100 N4 |
| ② 6-8 | black | | 100 | | 8714-1006 N4 |
| ② 8-10 | black | | 50 | | 8714-1008 N4 |
| ② 10-14 | black | | 100 | | 8714-1010 N4 |

Non-return valves PP



Valve made of PP and POM, seal made of EPDM, springs made of stainless steel 1.4401.

- ▶ Max. operating pressure 6 bar (at + 20°C)
- ▶ Max. operating temperature 80°C
- ▶ Pressure difference 12 mbar

Non-return valves PP

| Thread | Price € | Quantity scale from | Scale price € | Item no. |
|--------|---------|---------------------|---------------|--------------|
| 1/2" | | 5 | | 8540-0012 N3 |