



Two-way valves

Three-way valves

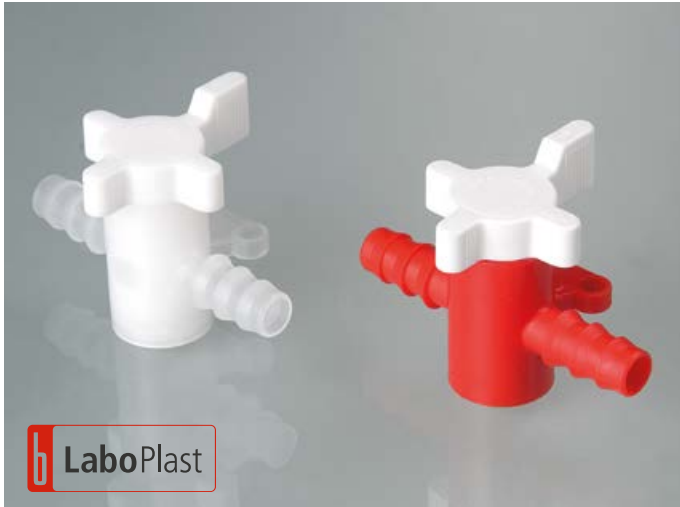

Two and three-way valves are used for transfer of liquids or gases in order to release the flow, to block it or to change its direction.

- ▶ PVDF: excellent chemical resistance, transparent, suitable for food
- ▶ PP/PE: for industrial use, red/white
- ▶ Operating temperature: PVDF +0 up to +40 °C, PP/PE +5 up to +40 °C
- ▶ Resistant to compression max. 1 bar
- ▶ With mounting plate for easy installation

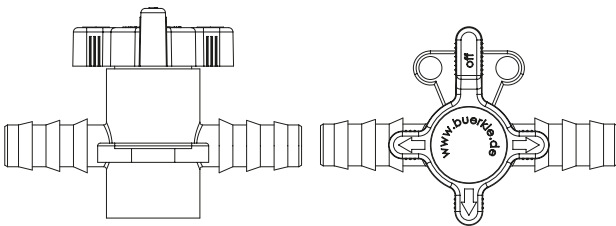

Two-way valves

Material	For dia. mm	Nominal width mm			
PP/PE	5-7	4			
PP/PE	7-9	6			
PP/PE	9-11	8			
PP/PE	11-13	8			
PVDF	5-7	4			
PVDF	7-9	6			
PVDF	9-11	8			
PVDF	11-13	8			

Three-way valves

Material	For dia. mm	Nominal width mm			
PP/PE	5-7	4			
PP/PE	7-9	6			
PP/PE	9-11	8			
PP/PE	11-13	8			
PVDF	5-7	4			
PVDF	7-9	6			
PVDF	9-11	8			
PVDF	11-13	8			